



PO Box 6180 • 6855 Hermosa Circle • Buena Park, CA 90622
Ph: 714-562-0500 • Fx: 714-562-0600 • TF: 1-888-TRIMLOK (874-6565)
Email: info@trimlok.com • Website: www.trimlok.com

Engineering Specifications for Edge Guard

Description: **Edge Guard** is a pre-glued, flexible plastic trim with a Mylar or clear cover. It gives a beautiful, finished appearance.

General Temperature Ratings: -20° F to +158° F

Base Material: Poly Vinyl Chloride (PVC), 97 Shore A Durometer


Decorative Material: Mylar

Adhesive: Hot Melt Adhesive
Butyl Adhesive Sealant (Optional)

Splice Policy:

TAPE SPLICE CHART	
FT/ REEL	# SPLICE ALLOWED
100 FT REEL	1 MAX
250 FT REEL	2 MAX
500 FT REEL	3 MAX

PART SPLICE CHART	
FT/ REEL	# SPLICE ALLOWED
250 FT REEL	1 MAX
500 FT REEL	2 MAX
750 FT REEL	3 MAX
1000 FT REEL	4 MAX

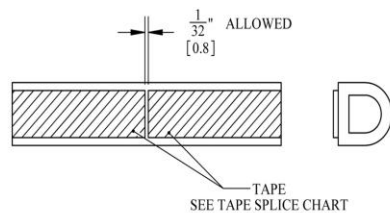

EXCEPTION:
EXCLUDED FROM
THIS POLICY

X101 SINGLE
X103 SINGLE
X105 SINGLE
X108 SINGLE
X109 SINGLE
X119 SINGLE
X202 SINGLE

Trim-Lok®, Inc. warrants all products to be free from defects in material and workmanship for a period of ninety (90) days from date of purchase. This warranty does not include damage to products resulting from accident, misuse, improper installation or storage, and unauthorized alterations. Trim-Lok's warranty obligation shall be limited to furnishing substitute products for original products, which in Trim-Lok's sole judgement, have proven defective in material or workmanship within the ninety (90) day warranty period.

Any implied warranties of merchantability or propriety for any particular purpose, shall be strictly limited in duration to that of the express warranty set forth above. In no event shall Trim-Lok be liable for any special, incidental or consequential damages resulting from the manufacture, sale, or use of these products under any legal theory. Said damages shall include, but not be limited to, lost profits, damage to property, or damages for personal injury. Trim-Lok's liability shall in no case exceed the price paid for the product claimed to be defective.

All information contained herein is the property of Trim-Lok Inc. Possession of this document does not convey any rights to transmit such information, or to use, to sell or manufacture from such information. No reproduction or publication of this document shall be made without written authorization from Trim-Lok Inc.