LOCKING GASKET

Locking Gasket is an EPDM dense rubber extrusion designed to lock in the installation of stationary windows or windshields. Locking Gaskets provide a secure seal between a metal or fiberglass body panel and a glass or plexiglas window. Available in one-piece and two-piece styles with a lock-strip, and are highly resistant to numerous environmental conditions.

- Resistance to Ozone — Excellent
- Water Absorption — Excellent
- Sunlight Aging — Excellent
- Low Temperature — Excellent
- General Temperature Rating -40˚ to + 212˚

ONE-PIECE LOCKING GASKETS

LK1522

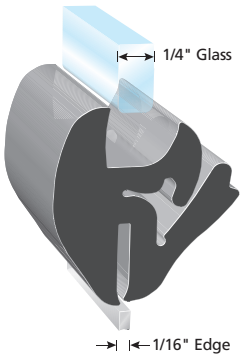

LK1663

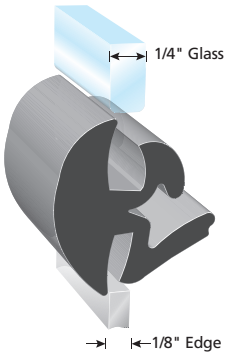

LK987

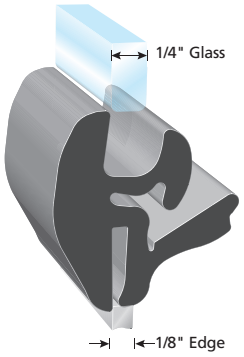

LK1536

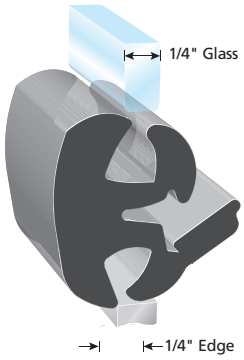

LK2022

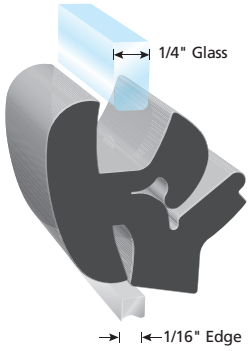

LK2015

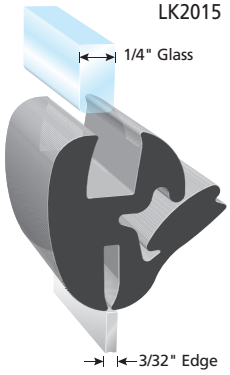

LK1615

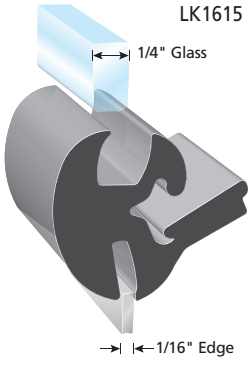

LK2001

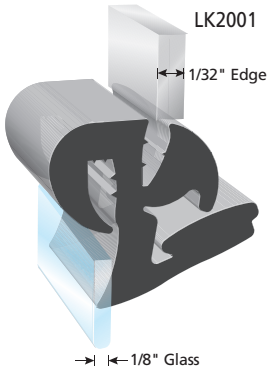

LK1621

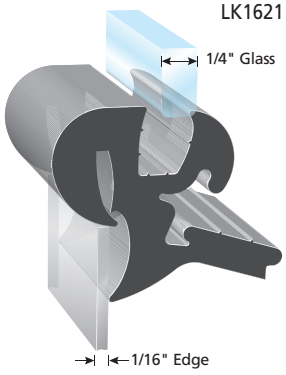

LK1660

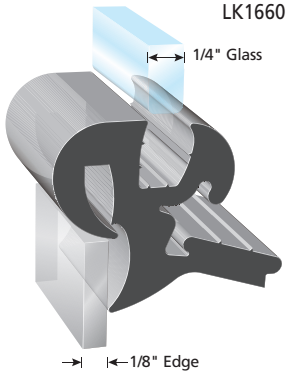

	Part Number	Glass Panel Thickness	Body panel thickness	**Minimum recommended clearance between glass and edge	Overall Height	Minimum recommended radius of panel opening	Weight per foot
Installed Profile Example  ** Minimum Recommended Clearance	LK1522	0.1875" – .250"	0.035" – 0.067"	0.301"	1.07"	2.50"	0.275 lbs.
	LK1663	0.1875" – .250"	0.09" – 0.14"	0.220"	0.90"	1.50"	0.196 lbs.
	LK987	0.1875" – .250"	0.09" – 0.14"	0.265"	1.07"	2.50"	0.246 lbs.
	LK1536	0.1875" – .250"	0.1875" – 0.25"	0.406"	1.09"	3.50"	0.225 lbs.
	LK2022	0.250" – .313"	0.04" – .08"	0.280"	0.970"	2.50"	0.323 lbs.
	LK2015	0.200" – .250"	0.075" – .095"	0.260"	0.95"	2.50"	0.236 lbs.
	LK1615	0.1875" – .250"	0.06" – 0.09"	0.300"	0.906"	2.50"	0.275 lbs.
	LK2001	0.120" – .140"	0.030" – .060"	*.160"	1.00"	2.50"	0.286 lbs.
	LK1621	0.1875" – 0.250"	0.046" – 0.075"	*.140"	0.937"	2.00"	0.26 lbs.
	LK1660	0.1875" – 0.250"	0.075" – 0.140"	*.140"	1.00"	2.00"	0.293 lbs.

* Offset dimension between glass and body panel.

1-888-874-6565
TRIM-LOK® INC.
www.trimlok.com

LOCKING GASKET

INSTALLATION

1. Secure Locking Gasket to body panel.

2. Lubricate Locking Gasket. Then slide glass in bottom first.

3. Finish working rubber around glass with tools found on pages 40-41.

TWO-PIECE LOCKING GASKETS

Part 1

See our how to install video at:
www.locking-gasket-install.info

LK1035



LK1179

LK1488

LK1456

LK1696

Part 2 **LOCKING KEY OPTION**

Installed Profile Example

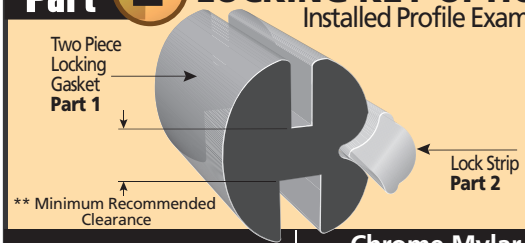

Black Insert Key



LK937

Chrome Mylar Strip Insert Key



LK723C

LK1573

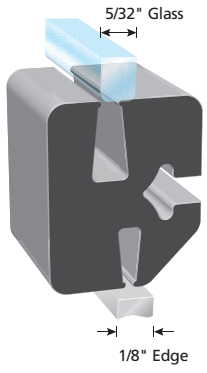

LK2016

LK2004

See page 40-41 for more information on Locking Gasket installation tools.

Part Number	Glass Panel Thickness	Body panel thickness	**Minimum recommended clearance between glass and edge	Overall Height	Minimum recommended radius of panel opening	Weight per foot	Matching insert key part number (part 2)
LK1035	0.1875" – .250"	0.050" – .095"	0.23"	0.85"	2.25"	0.155 lbs.	LK937
LK1179	0.1875" – .250"	0.093" – .140"	0.30"	1.10"	2.5"	0.277 lbs.	LK937
LK1488	0.1875" – .250"	0.1875" – .250"	0.30"	1.00"	3.5"	0.202 lbs.	LK937
LK1456	0.1875" – .250"	0.175" – .188"	0.30"	0.95"	2.0"	0.198 lbs.	LK937
LK1696	0.1375" – .250"	0.175" – .188"	0.260"	0.95"	2.0"	0.193 lbs.	LK937
LK1573	0.125" – .187"	0.100" – .140"	0.246"	0.961"	4.0"	0.289 lbs.	LK937
LK2016	0.180" – .220"	0.100" – .130"	0.265"	1.29"	4.0"	0.358 lbs.	LK937
LK2004	0.180" – .220"	0.09" – .125"	0.35"	1.07"	2.5"	0.241 lbs.	LK937